

## 产品介绍

CFR-A5

0 100CN

30 85CN

GB/T 386, ASTM D613 IP 41, EN ISO 5165

## 产品特点

- CFR

- 

- 90°

- 

- (13° BTDC)

- 

OMT


- 

- 60L 0.2 0.4 MPa 15 25

- 

- 

- 

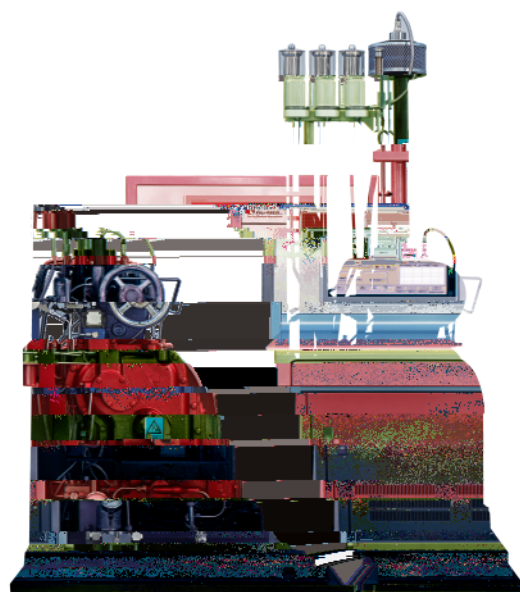

- 3 1
- 
- 
- 
- 
- 

### 技术参数

GB/T 386, ASTM D613 IP 41, EN ISO 5165

0 100 30 85

82.55mm 3.250inch

114.30mm 4.50inch

8:1 36:1,

611729.10mm<sup>3</sup> 37.33in<sup>3</sup>

100 ± 2 212 ± 3

900rpm ± 9rpm

13° ± 0.2°

10.30MPa ± 0.34MPa 1500psi ± 50psi

13.0mL/min ± 0.2mL/min

38 ± 3 100 ± 5

0.20mm ± 0.025mm 0.008in. ± 0.001in.

66 ± 0.5 150 ± 1

57 ± 8 135 ± 15

172kPa 207kPa 25psi 30psi

3275kPa ± 138kPa 475psi ± 20psi

-0.25kPa -1.5kPa

635mm ± 25mm 25in. ± 1in.

USB

LIMS

15KW

15 35  
20% 90%RH

AC380V± 10%,50Hz  
AC220V± 10% 50Hz

1520mm × 900mm × 1760mm

1200KG